


## corner profile with fiberglass mesh



Download



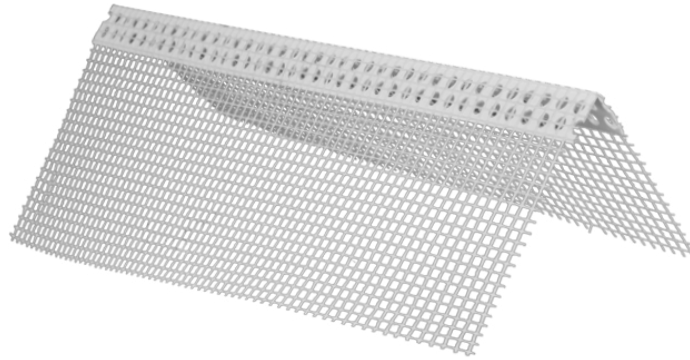








## INDEX

	Pag.
Utilization.....	2
Models.....	2
Technical features.....	2

## 1 Utilization


Manufactured by GRUPPO STAMPLAST, the plastic corner profile is used to reinforce the corner. It is equipped with excellently made fiberglass mesh well-welded at the profile that ensure a durable fixage.

## 2 Models

COD.	MOD.						
PPLARETE25-01	8x12cm		2,5m	150m	4200m	110x110x260	0,121 kg/m
PPLARETE25-03	10x15cm		2,5m	125m	3750m	80x270x110	0,090 kg/m
PPLARETE25-05	10x10cm		2,5m	150m	4200m	110x110x260	0,121 kg/m

\*MISURE IN CENTIMETRI

## 3 Technical features



### Materials

Profile: **PVC**  
Mesh: **Fiberglass**

### Colors

White 

MOD.	A*	B*	C*
8x12cm	22	80	120
10x15cm	22	100	100
10x10cm	22	100	100

\*MEASURES IN MILLIMETERS

### Fiberglass mesh technical features

Characteristic	Value	Test method
Size of hole (mm)	3,6 x 4,3	ETAG 004 Annex C.3.3
Thread count per 10cm	warp: (24x2) +/- (1x2) weft: 18 +/- 1	DIN 53853
Weight (gr/m2)	150 +/- 5%	ETAG 004 Annex C.3.1
Tensile strength in the as-delivered state (N/50mm)	average value: ≥2000 (warp) ≥1900 (weft) single value: ≥1750 (warp) ≥1650 (weft)	ETAG 004 5.6.7.1.1
Tensile strength after ageing	≥50% of the strength in the as-delivered state ≥20N/mm	ETAG 004 5.6.7.1.2
Ash content (%)	83 +/- 3	ETAG 004 Annex C.3.2

# corner profile with fiberglass mesh